EVBUM2279/D

KAI-4011 / KAI-4021 / KAI-04022 Imager Board User's Manual

ON Semiconductor®

www.onsemi.com

EVAL BOARD USER'S MANUAL

Description

The KAI−4011 / KAI−4021 / KAI−04022 Imager Evaluation Board, referred to in this document as the Imager Board, is designed to be used as part of a two−board set, used in conjunction with a Timing Generator Board. ON Semiconductor offers an Imager Board / Timing Generator Board package that has been designed and configured to operate with the KAI−4011 / KAI−4021 / KAI−04022 Image Sensors.

The Timing Generator Board generates the timing signals necessary to operate the CCD, and provides the power required by the Imager Board. The timing signals, in LVDS format, and the power, are provided to the Imager Board via the interface connector (J1). In addition, the Timing Generator Board performs the processing and digitization of the analog video output of the Imager Board.

The KAI−4011 / KAI−4021 / KAI−04022 Imager Board has been designed to operate the KAI−4011 / KAI−4021 / KAI−04022 CCDs with the specified performance at 40 MHz pixel clocking rate and nominal operating conditions. (See the KAI−4011 / KAI−4021 / KAI−04022 performance specifications for details).

For testing and characterization purposes, the KAI−4011 / KAI−4021 / KAI−04022 Imager board provides the ability to adjust many of the CCD bias voltages and CCD clock level voltages by adjusting potentiometers on the board. The Imager Board provides the means to modify other device operating parameters (CCD reset clock pulse width, VSS bias voltage) by populating components differently on the board.

INPUT REQUIREMENTS

Table 1. POWER REQUIREMENTS

Power Supplies	Minimum	Typical	Maximum	Units
+5 V_MTR Supply	4.9	5.0	5.1	V
		1400		mA
−5 V_MTR Supply	−5.1	−5.0	−4.9	V
		200		mA
VPLUS Supply	18	20	21	V
		175		mA
VMINUS Supply	−21	−20	−18	V
		150		mA

Table 2. SIGNAL LEVEL REQUIREMENTS

Input Signals (LVDS)	V_{min}	$V_{threshold}$	V_{max}	Units	Comments
H1A (±)	0	±0.1	2.4	V	H1A clock
H1B (±)	0	±0.1	2.4	V	H1B clock
H2A (±)	0	±0.1	2.4	V	H2A clock
H2B (±)	0	±0.1	2.4	V	H2B clock
FDG	0	±0.1	2.4	V	Fast Dump clock
R (±)	0	±0.1	2.4	V	Reset clock
V1 (±)	0	±0.1	2.4	V	V1 clock
V2 (±)	0	±0.1	2.4	V	V2 clock

© Semiconductor Components Industries, LLC, 2014

Table 2. SIGNAL LEVEL REQUIREMENTS

Input Signals (LVDS)	V_{min}	$V_{threshold}$	V_{max}	Units	Comments
V2B (±)	0	±0.1	2.4	V	V2B clock
V3RD (±)	0	±0.1	2.4	V	V2 Clock 3rd level
VES (±)	0	±0.1	2.4	V	Electronic Shutter
AMP_ENABLE (±)	0	±0.1	2.4	V	Output Amplifier Enable

ARCHITECTURE OVERVIEW

The following sections describe the functional blocks of the KAI−4011 / KAI−4021 / KAI−04022 Imager Board (Refer to Figure 1).

Power Filtering and Regulation

Power is supplied to the Imager Board via the J1 interface connector. The power supplies are de−coupled and filtered with ferrite beads and capacitors to suppress noise. Voltage regulators are used to create the +15 V and –15 V supplies from the VPLUS and VMINUS supplies.

LVDS Receivers / TTL Buffers

LVDS timing signals are input to the Imager Board via the J1 interface connector. These signals are shifted to TTL levels before being sent to the CCD clock drivers.

CCD Pixel−Rate Clock Drivers (H1, H2 & Reset Clocks)

The pixel rate CCD clock drivers utilize two fast switching transistors that are designed to translate TTL−level input clock signals to the voltage levels required by the CCD. The high level and low level of the CCD clocks are set by potentiometers.

Reset Clock One−Shot (U15; not populated)

The pulse width of the RESET_CCD clock used to be set by a programmable One−Shot. The One−Shot was configured to provide a RESET_CCD clock signal with a pulse width from 5 ns to 15 ns. Now, the pulse width control functionality is provided by the KSC−1000 Timing Generator Board, and the one−shot has been bypassed by removing U15 and inserting a shorting resistor on pads 1 and 2 of U15.

CCD VCLK Drivers

The vertical clock (VCLK) drivers consist of MOSFET driver IC's. These drivers are designed to translate the TTL−level clock signals to the voltage levels required by the CCD. The high, middle, and low voltage levels of the vertical clocks are set by potentiometers buffered by operational amplifiers configured as voltage followers. The current sources for these voltage levels are high current (up to 600 mA) transistors. The V2_CCD high level clock voltage is switched from V_MID to V_HIGH once per frame to transfer the charge from the photodiodes to the vertical CCDs.

CCD FDG Driver

The Fast Dump Gate (FDG) driver is a transistor that will switch the voltage on the FDG pin of the CCD from FDG_LOW to FDG_HIGH during Fast Dump Gate operation. When not in operation, or when the Fast Dump Gate feature is not being utilized, the FDG pin of the CCD is held at FDG_LOW. The FDG_HIGH and FDG_LOW voltage levels of the FDG driver are set by resistor divider circuits, and are buffered by operational amplifiers configured as voltage followers.

VES Circuit

The quiescent CCD substrate voltage (VSUB) is set by a potentiometer. For electronic shutter operation, the VES signal drives a transistor amplifier circuit that AC−couples the voltage difference between the VPLUS and VMINUS supplies onto the Substrate voltage. This creates the necessary potential to clear all charge from the photodiodes, thereby acting as an electronic shutter to control exposure.

CCD Bias Voltages

The CCD bias voltages are set by potentiometers, buffered by operational amplifiers configured as voltage followers. The bias voltages are de−coupled at the CCD pin.

CCD Image Sensor

This evaluation board supports the KAI−4011, KAI−4021, and KAI−04022 Image Sensors.

Emitter−Follower

The VOUT_CCD signals are buffered using bipolar junction transistors in the emitter−follower configuration. These circuits also provide the necessary 5 mA current sink for the CCD output circuits.

Line Drivers

The buffered VOUT_CCD signals are AC−coupled and driven from the Imager Board by operational amplifiers in a non−inverting configuration. The operational amplifiers are configured to have a gain of 2, to correctly drive 75 Ω video coaxial cabling from the SMB connectors.

OPERATIONAL SETTINGS

The Imager board is configured to operate the KAI−4011 / KAI−4021 / KAI−04022 Image Sensors under the following operating conditions:

DC Bias Voltages

The following voltages are fixed, or adjusted with a potentiometer as noted. The nominal values listed in Table 3 were correct at the time of this document's publication, but may be subject to change; refer to the KAI−4011 / KAI−4021 / KAI−04022 device specification.

Table 3. DC BIAS VOLTAGES

Description	Symbol	Min	Nominal	Max	Units	Potentiometer	Notes
Left Output Amplifier Supply	VDDL		15.0		V		
Right Output Amplifier Supply	VDDR		15.0		V		1
Reset Drain	VRD	6.7	12.0	13.5	V	R23	3
ESD Protection	ESD		−9.0		V		
Substrate	VSUB	8.5	TBD	15.0	V	R18	3
Output Gate Left	VOGL	−7.5	−3.5	−0.4	V	R11	2, 3
Output Gate Right	VOGR	−7.5	−3.5	−0.4	V	R7	2, 3

1. If the CCD is to be operated in single output mode only (VOUT_LEFT) the unused output amplifier supply can be tied to ground to conserve power by not populating R71, R72 and C76 and by replacing C75 with a 0 Ω resistor.
2. The Output Gate signals VOGL and VOGR may be controlled independently, or, by installing R28 and R33 and removing R29, may be set to the same potential, controlled by R11.
3. The Min and Max voltages in the table indicate the imager board potentiometer adjustable voltage range. These values may exceed the specified CCD operating conditions. See the KAI−4011 / KAI−4021 / KAI−04022 device specification for details.

Clock Voltages

The following clock voltage levels are fixed, or adjusted with a potentiometer as noted. The nominal values listed in Table 4 were correct at the time of this document's publication, but may be subject to change; refer to the KAI−4011 / KAI−4021 /KAI−04022 device specification.

Table 4. CLOCK VOLTAGES

Description	Symbol	Level	Min	Nom	Max	Unit	Potentiometer	Notes
Horizontal CCD Clock	Hxx_CCD	Low	−7.5	−4.5	−0.8	V	R147	4
		High	0.4	0.5	7.5	V	R127	5
Vertical CCD Clock	Vx_CCD	Low	−14.0	−9.0	−1.0	V	R40	6
	Vx_CCD	Mid	−2.5	−0.0	−0.0	V	R66	7
	V2_CCD	High	4.0	9.0	11.0	V	R48	
Reset Clock	RESET_CCD	Low	−7.0	−3.5	−1.0	V	R20	
		High	1.0	5.0	7.0	V	R19	
Fast Dump Clock	FDG_CCD	Low		−9.0		V		8
		High		5.0		V		

4. The H1A_CCD, H1B_CCD, H2A_CCD, and H2B_CCD low levels are controlled by the same potentiometer (R147).
5. The H1A_CCD, H1B_CCD, H2A_CCD, and H2B_CCD high levels are controlled by the same potentiometer (R127).
6. V1_CCD and V2_CCD low levels are controlled by the same potentiometer (R40).
7. V1_CCD and V2_CCD mid levels are controlled by the same potentiometer (R66).
8. FDG is used to flush the device when operated in Still Mode.

BLOCK DIAGRAM AND PERFORMANCE DATA

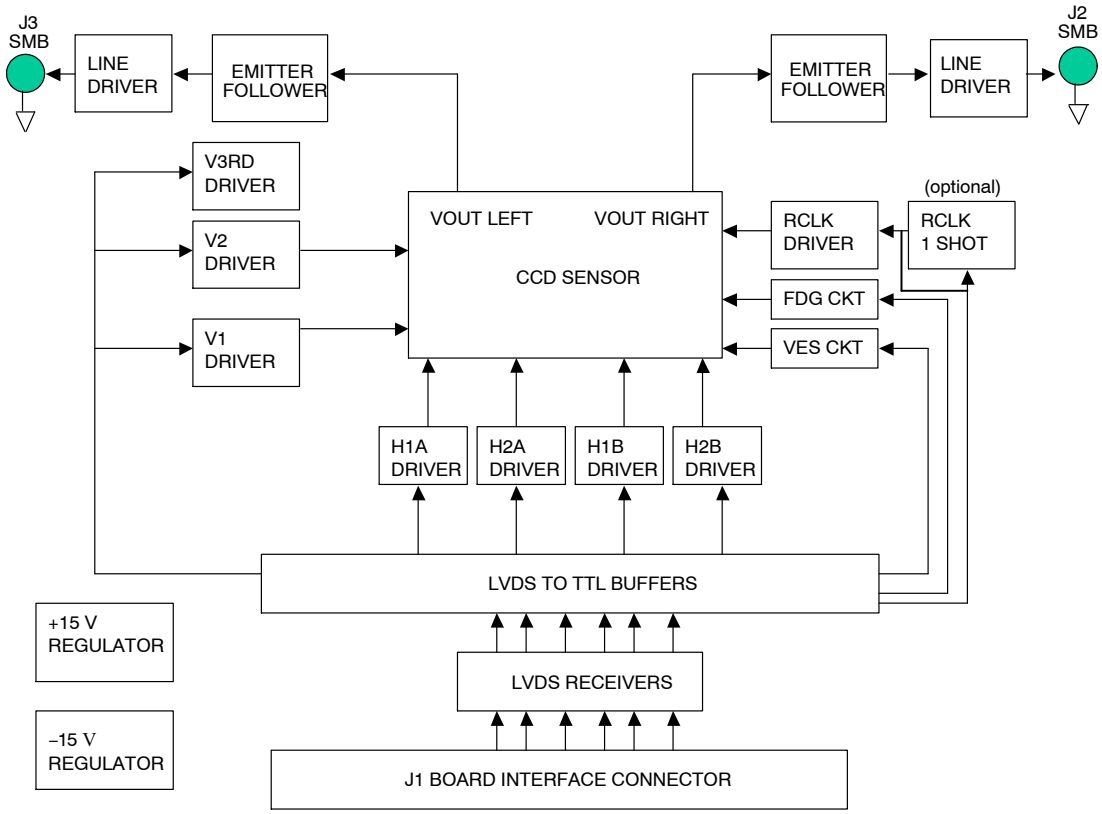

Figure 1. KAI−4011 / KAI−4021 / KAI−04022 Imager Board Block Diagram

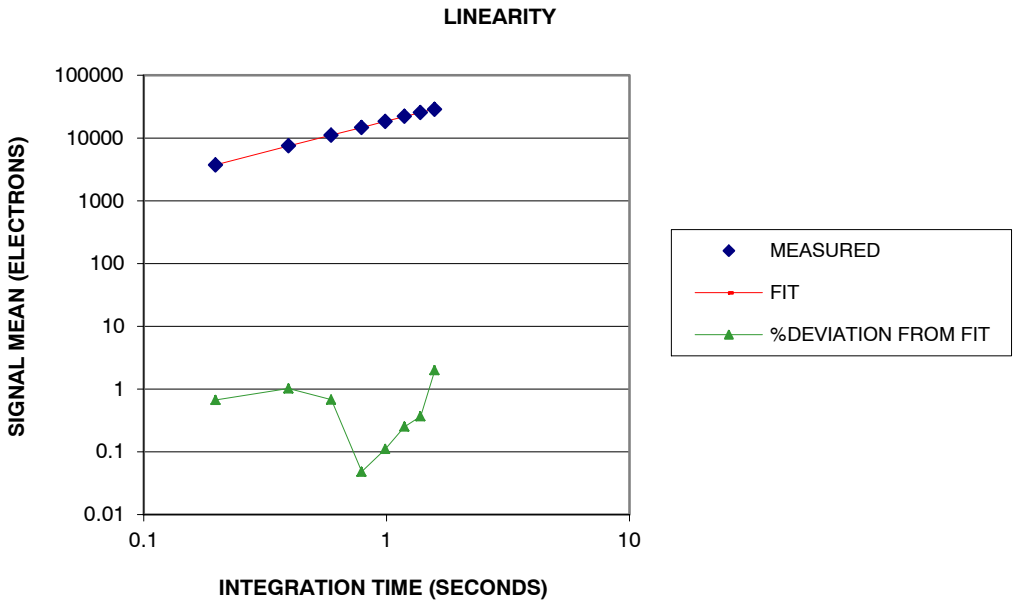

Figure 2. Measured Performance − Linearity

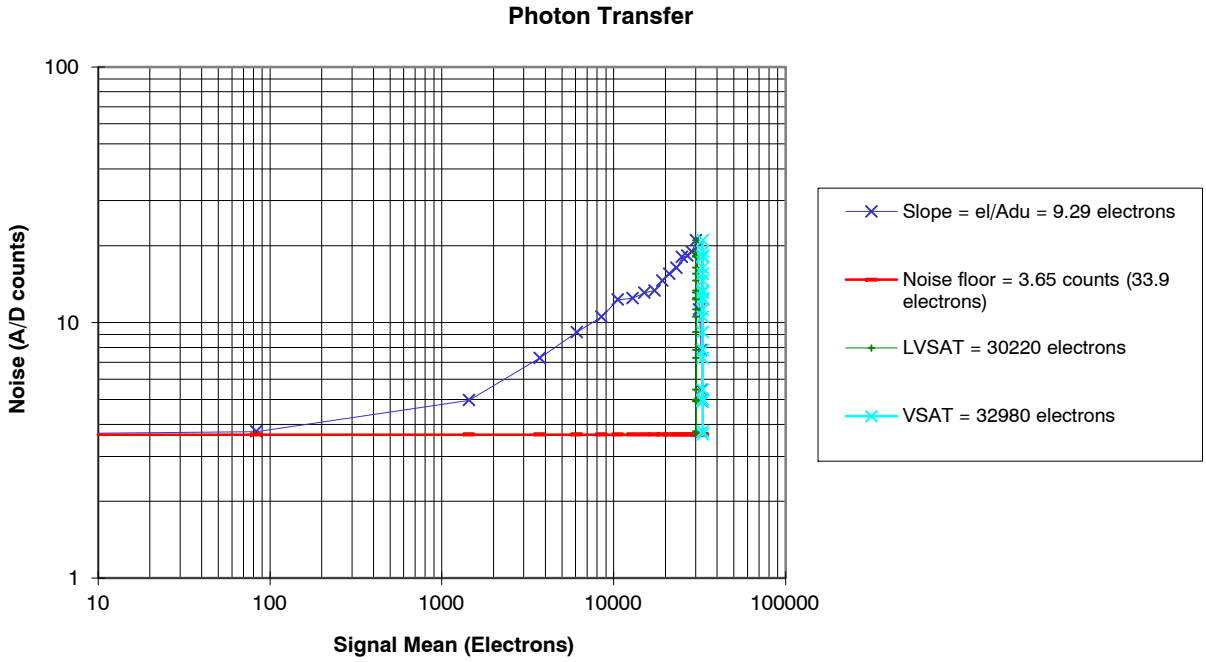

Figure 3. Measured Performance – Dynamic Range and Noise Floor

CONNECTOR ASSIGNMENTS AND PINOUTS

SMB Connectors J2 and J3

The emitter−follower buffered CCD_VOUT signals are driven from the Imager Board via the SMB connectors J2 and J3. Coaxial cable with a characteristic impedance of 75 Ω should be used to connect the imager board to the Timing Generator Board to match the series and terminating resistors used on these boards.

Table 5. J1 INTERFACE CONNECTOR PIN ASSIGNMENTS

Pin	Signal	Pin	Signal
1	N.C.	2	N.C.
3	AGND	4	AGND
5	VES+	6	VES−
7	AGND	8	AGND
9	FDG+	10	FDG−
11	AGND	12	AGND
13	V3RD+	14	V3RD−
15	AGND	16	AGND
17	V2B+	18	V2B−
19	AGND	20	AGND
21	V2+	22	V2−
23	AGND	24	AGND
25	V1+	26	V1−
27	AGND	28	AGND
29	R+	30	R−
31	AGND	32	AGND
33	H2B+	34	H2B−
35	AGND	36	AGND
37	H2A+	38	H2A−
39	AGND	40	AGND
41	H1B+	42	H1B−
43	AGND	44	AGND
45	H1A+	46	H1A−
47	N.C.	48	N.C.
49	AGND	50	AGND
51	N.C.	52	N.C.
53	VMINUS_MTR	54	VMINUS_MTR
55	N.C.	56	N.C.
57	AGND	58	AGND
59	AMP_ENABLE+	60	AMP_ENABLE−
61	−5 V_MTR	62	−5 V_MTR
63	N.C.	64	N.C.
65	AGND	66	AGND
67	N.C.	68	N.C.
69	+5 V_MTR	70	+5 V_MTR
71	N.C.	72	N.C.
73	AGND	74	AGND
75	N.C.	76	N.C.
77	VPLUS_MTR	78	VPLUS_MTR
79	N.C.	80	N.C.

Warnings and Advisories

ON Semiconductor is not responsible for customer damage to the Imager Board or Imager Board electronics. The customer assumes responsibility and care must be taken when probing, modifying, or integrating the ON Semiconductor Evaluation Board Kits.

When programming the Timing Board, the Imager Board must be disconnected from the Timing Board before power is applied. If the Imager Board is connected to the Timing Board during the reprogramming of the Altera PLD, damage to the Imager Board will occur.

Purchasers of an Evaluation Board Kit may, at their discretion, make changes to the Timing Generator Board firmware. ON Semiconductor can only support firmware developed by, and supplied by, ON Semiconductor. Changes to the firmware are at the risk of the customer.

Ordering Information

Please address all inquiries and purchase orders to:

Truesense Imaging, Inc.
1964 Lake Avenue
Rochester, New York 14615
Phone: (585) 784−5500
E−mail: info@truesenseimaging.com

ON Semiconductor reserves the right to change any information contained herein without notice. All information furnished by ON Semiconductor is believed to be accurate.

ON Semiconductor and the ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative